




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-830087	2008/03/11	Li Chi Cheng	Change Views

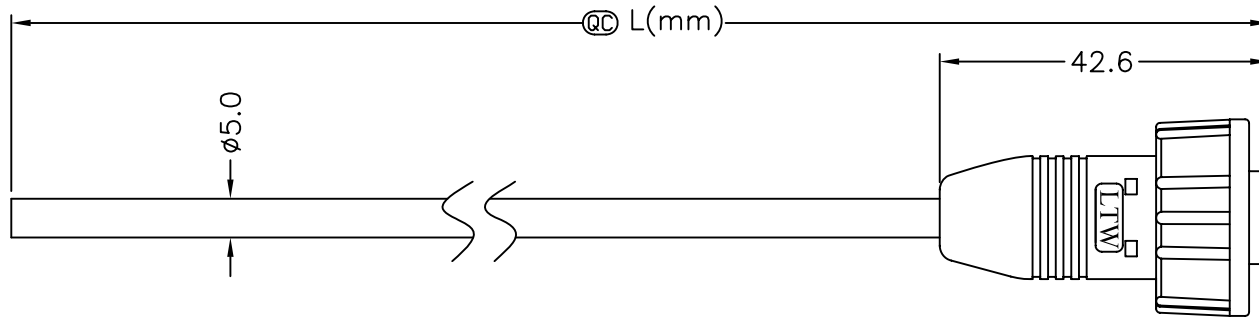


Cable ②

LTWUA-20BFMM-SL7000 ①
 Color: Black
 LTWUA-20BFMM-SL7AXX

XX :01~05Meters
 01 :01Meter
 02 :02Meters
 :
 :
 05 :05Meters

Cable Length(L):01~05Meters



Note:

- * @C Important Dimension
- * Waterproof Rate: IP67
- * Connector: Black, USB2.0-A Male Solder
- * Cable: USB 2.0, 28#*1P+24#*2C+Al/My+D+B Black, PVC Jacket UV Resistant, OD=5.0
- * Cable Length Tolerance: 1M~5M±5%mm

Drain	28AWG	地線	Shield
Black	24AWG	黑	4
Green	28AWG	綠	3
White	28AWG	白	2
Red	24AWG	紅	1
Wire Color			Conn.
Pin Out			

Twist

UNIT:mm		TITLE USB, Cable Screw 20A F Conn M Pin	
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1	
REV. B	SIZE A4	@C :Inspection Item	

LTW
 亮泰企業股份有限公司

ITEM NO	DRAWN BY Li Chi Cheng	DATE 2008/03/11
DWG NO LTWUA-20BFMM-SL7AXX	CHECKED BY Jill	DATE 2008/03/12
CUSTOMER	APPROVED BY Kevin	DATE 2008/03/13

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY LTW.