



DMP Electronics Inc.

8F, No 12, Wu-Guan 7 Rd., Wu Gu Industrial Park
Wu Gu Xiang, Taipei 248, Taiwan R.O.C.
TEL: 886 2 2290 0770 FAX: 886 2 2290 2335

RoBoard Module RM-G146

Manual V1.01

The Heart of Robotics

Jan 2011

DMP Electronics Inc

ROBOARD

◆ Copyright

The information in this manual is subject to change without notice for continuous improvement in the product. All rights are reserved. The manufacturer assumes no responsibility for any inaccuracies that may be contained in this document. And makes no commitment to update or to keep current the information contained in this manual.

No part of this manual may be reproduced, copied, translated or transmitted, in whole or in part, in any form or by any means without the prior written permission of the DMP Electronics Inc.

©Copyright 2010 DMP Electronics Inc.
Manual No. RM-G146-01 Ver.1.01 ◆ Jan, 2011

◆ Trademarks Acknowledgment

Other brand names or product names appearing in this document are the properties and registered trademarks of their respective owners. All names mentioned herewith are served for identification purpose only.



TableOfContents

Chapter 1.....	4
Introduction.....	4
1.1 Packing List.....	4
1.2 Product Description.....	5
1.4 I ² C Address	7
1.5 Board Dimension	8
Chapter 2.....	9
Installation.....	9
2.1 Board Outline.....	9
2.2 Connectors & Pin 1 Location.....	10
2.3 Connectors & Jumpers Summary	11
2.4 Pin Assignments.....	12
J1: I²C connector (Top)	12
J2: I²C connector (Bottom)	12
Chapter 3.....	13
Development Note	13
Sample and development code.....	13

Chapter 1

Introduction

1.1 Packing List

Product Name	Package
RM-G146	RoBoard Module RM-G146
	
Cable-RM-1	1x6 pin Cable x 1
	

1.2 Product Description

The RoBoard Module RM-G146 is fully integrated 9-Axis module, combines 3-axis magneto-resistive sensor and 3-axis accelerometer with the LSM303DLH, and 3-axis angular rate sensor (Gyroscope) with the MPU-3050, simply and all done through I2C interface, the dimension of it is wee as 20 x 20 mm.

The MPU-3050 is comprised of an embedded 3-axis digital gyroscope. offers a programmable full-scale range from ± 250 to ± 2000 degrees per second which ensures precision tracking of both fast and slow motions.

The LSM303DLH is a system-in-package featuring a 3D digital linear acceleration sensor and a 3D digital magnetic sensor. It has a linear acceleration full-scale of $\pm 2 g / \pm 4 g / \pm 8 g$ and a magnetic field full-scale of $\pm 1.3 / \pm 1.9 / \pm 2.5 / \pm 4.0 / \pm 4.7 / \pm 5.6 / \pm 8.1$ gauss, both fully selectable by the user.

1.3 Specifications


	RM-G146 9-Axis sensor module
Gyroscope	MPU-3050
Magnetometer	LSM303DLH
Accelerometer	LSM303DLH
Interface	I ² C
Default Address	Gyroscope : 0xD0
	Magnetometer : 0x3C
	Accelerometer : 0x30
Connectors	1.25mm 6-pin wafer for I ² C x 2
Power Input	DC-in 5V
Dimension	20mm X 20mm
Weight	2.5g

1.4 I²C Address

- Magnetometer : 0x3C
- Gyroscope : 0xD0
- Accelerometer : 0x30

ROBoard

1.5 Board Dimension

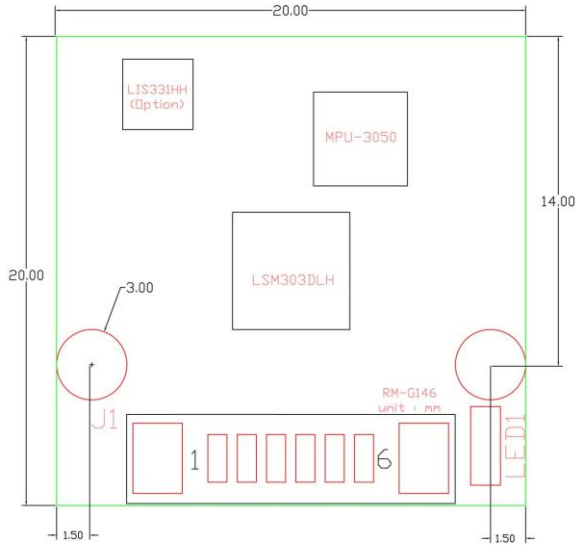


ROV


Chapter 2

Installation

2.1 Board Outline

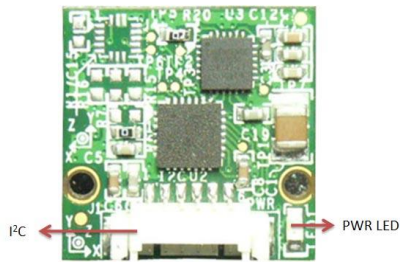


Top Side




Bottom Side

2.2 Connectors & Pin 1 Location

Connectors



Top Side




Bottom Side

Pin 1 Location



Top Side



Bottom Side

2.3 Connectors & Jumpers Summary

Summary Table

	Description	Type of Connections	Pin
J1	I ² C connector (Top)	Wafer, 2.54mm,6x1	6-pin
J2	I ² C connector (Bottom)	Wafer, 2.54mm,6x1	6-pin

2.4 Pin Assignments

J1: I²C connector (Top)

Pin #	Signal Name
1	Vcc (Red)
2	GND (Black)
3	SCL (Blue)
4	SDA (Green)
5	X (White)
6	X (Orange)

J2: I²C connector (Bottom)

Pin #	Signal Name
1	Vcc (Red)
2	GND (Black)
3	SCL (Blue)
4	SDA (Green)
5	X (White)
6	X (Orange)

Chapter 3

Development Note

Sample and development code

The RM-G146 provides sample and development code.
Please download from official website: <http://www.roboard.com>

Warranty

This product is warranted to be in good working order for a period of one year from the date of purchase. Should this product fail to be in good working order at any time during this period, we will, at our option, replace or repair it at no additional charge except as set forth in the following terms. This warranty does not apply to products damaged by misuse, modifications, accident or disaster. Vendor assumes no liability for any damages, lost profits, lost savings or any other incidental or consequential damage resulting from the use, misuse of, originality to use this product. Vendor will not be liable for any claim made by any other related party. Return authorization must be obtained from the vendor before returned merchandise will be accepted. Authorization can be obtained by calling or faxing the vendor and requesting a Return Merchandise Authorization (RMA) number. Returned goods should always be accompanied by a clear problem description.