






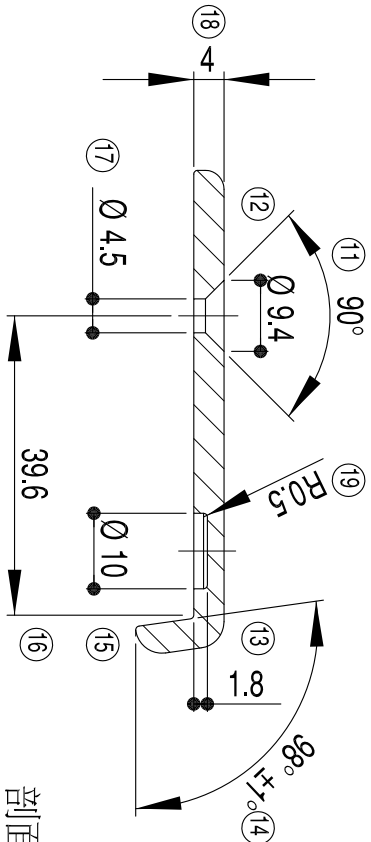


剖面圖 A-A

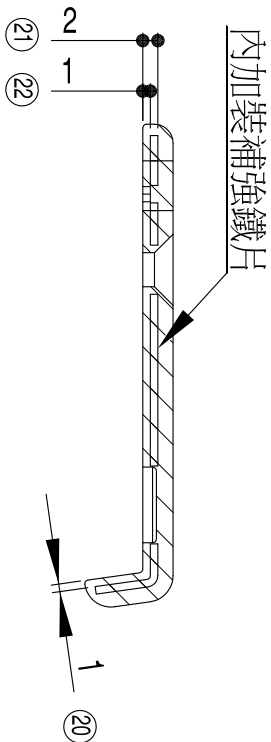


剖面圖 B-B


- 1.材質:*****
- 2.顏色:黑色.
- 3.處理:上背膠.
- 5.此處為B Type鐵片埋模定位點,請對此特徵做替換模仁.
- 4.成品毛邊<0.3mm
- 6.未標註尺寸公差皆為<MOD-PM>0.15mm.
- 7.B Type除外加補強鐵片與鐵片埋模定位點(細部放大圖C)外,其餘皆與A Type相同.

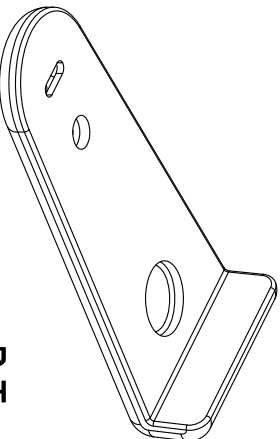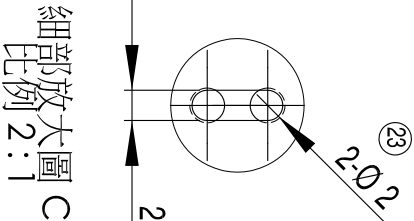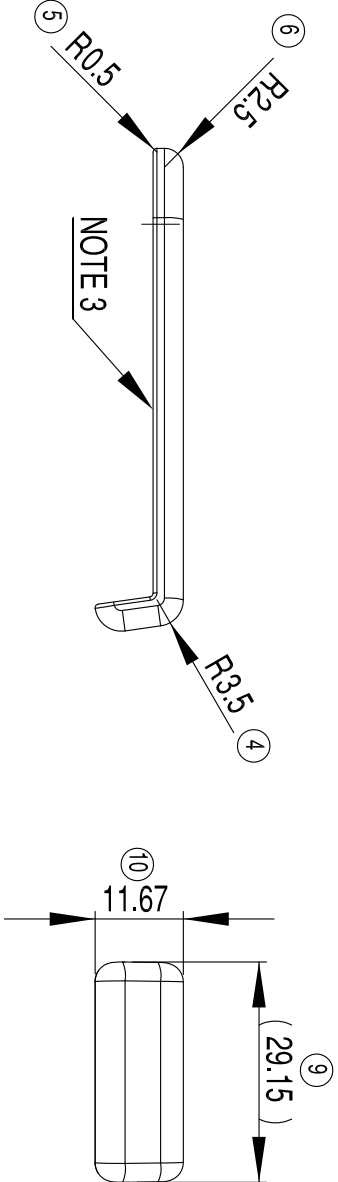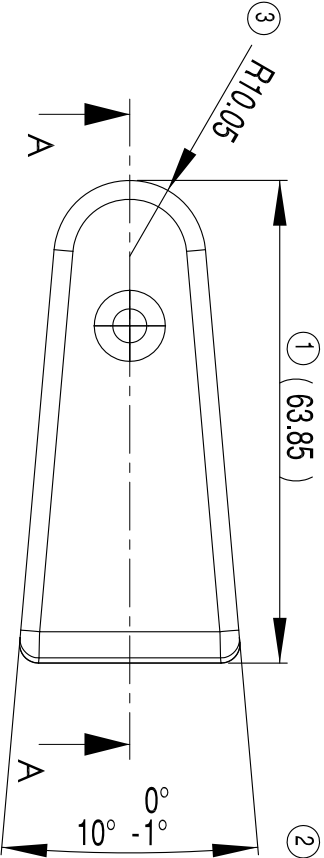

B Type

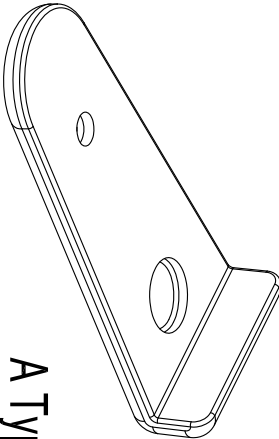

A Type

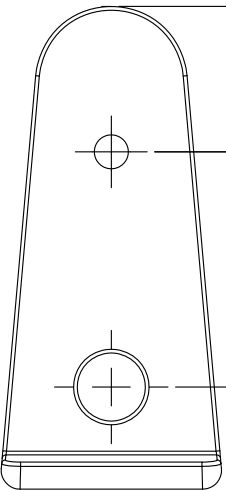

供評注



RANGE		0-30	30~80	80~180	180~315	315~800
TOL±						
Gen. Dist.(Metal)		0.05	0.10	0.15	0.20	0.25
Gen. Dist.(Resin)		0.1	0.15	0.20	0.25	0.30
Gen. Dim. (Metal)						
Gen. Dim. (Resin)						
Assy Dim.		0.15	0.25	0.30	0.50	0.80
Bend Dim.						

BASIC RANGE	DRN BY	08/17/2010	DM & P ELECTRONICS INC.			
.X	.XX	DSN BY	Derek	08/17/2010		
*****	*****	CKD BY	Derek	08/23/2010		
ANGULAR ± DEG	APPD BY					

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DM&P ELECTRONICS INC. NETWORKS AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

REV.	PART NO.	Shockproof_Rubber	ICE_PC	SCALE: 1:1(2:1)	PAGE: 1	OF 1
1.0		24				
DATE	APPD BY	DSN BY	ENGINEERING HANGE DESCRIPTION	UNIT: MM	PART NAME	REV.