

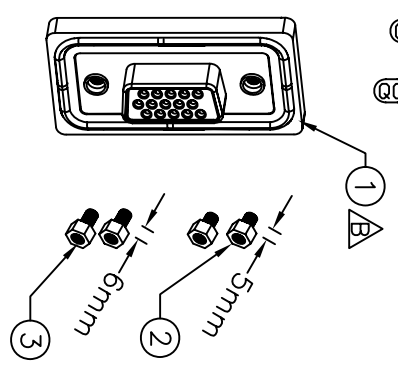
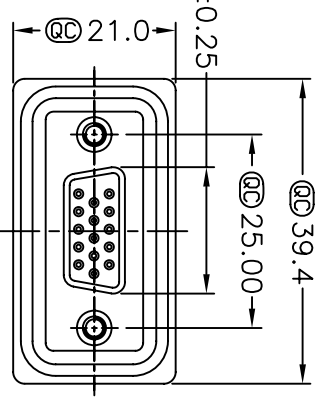


REV.	ECON. NO.	DATE	SIGN.	DESCRIPTION
B	LE3-710067	2006/12/16	DongYali	Move 0-Ring To ZSF00100669

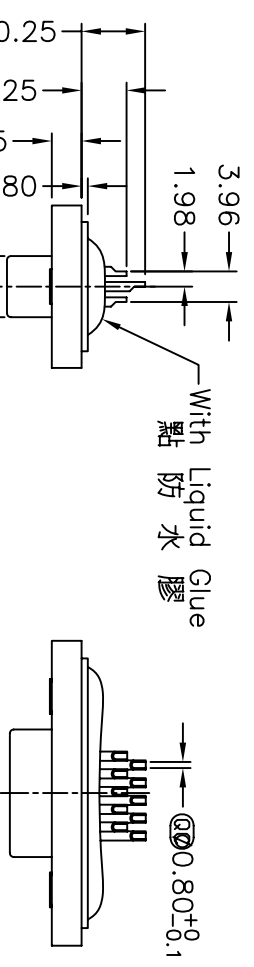


- Note:
- * @ Important Dimension.
 - * Waterproof Rate : IP68
 - * IP68: 1M of depth of water 24 hours (防水等級: IP68)
 - * (IP68: 1米水深 24小時)
 - * Do Mating Test After Glued 點膠後 須作對插測試
 - * HD-SUB Conn.: Black Core,PBT
 - * Plastic Jacket : Black,Nylon+GF
 - * Pin : Copper Alloy , Gold Plated
 - * Ring : Light Blue,Silicone
 - * Screw : Copper Alloy,Nickel Plated,#4-40 UNC
 - * Applicable Wire Range: 24AWG-28AWG
 - * 適用電線範圍 : 24AWG-28AWG

Panel Thickness
面板厚度
X(Max.)

Screw L=5.0 For Panel Thickness
Under 1.2mm
適用板厚為 1.2mm 以下

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

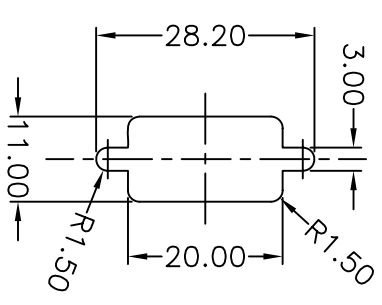

Recommended Panel Cut-Out
建議挖孔尺寸

UNIT:mm	TITLE	ITEM NO	DRAWN BY	DATE
TOLERANCE X .XX XXX ANGLES	D-SUB Conn. Panel Screw HD15P F Conn. F Pin	LTWHDB-15PFFS-SL8001	DongYali	2006/12/15
±0.25 ±0.1 ±0.05 ±.1	SCALE Free	DWG NO LTWHDB-15PFFS-SL8001	CHECKED BY Simon	DATE 2006/12/15
	REV. B	CUSTOMER	APPROVED BY Max	DATE 2006/12/15
	SIZE A4			
	SHEET 1 OF 1			
	Inspection Item			

LTW
亮泰企業股份有限公司